

# REFRO.RU



**Отдел продаж:** (495) 212-91-86  
(800) 333-30-81  
(звонок по РФ бесплатный)

**Запчасти:** (495) 374-78-30

**Ремонт, гарантия, ТО:** (495) 215-52-98




**Отдел продаж:** [info@refro.ru](mailto:info@refro.ru)

**Проектирование:** [project@refro.ru](mailto:project@refro.ru)

**Запчасти:** [zip@refro.ru](mailto:zip@refro.ru)

**Ремонт, гарантия:** [service@refro.ru](mailto:service@refro.ru)

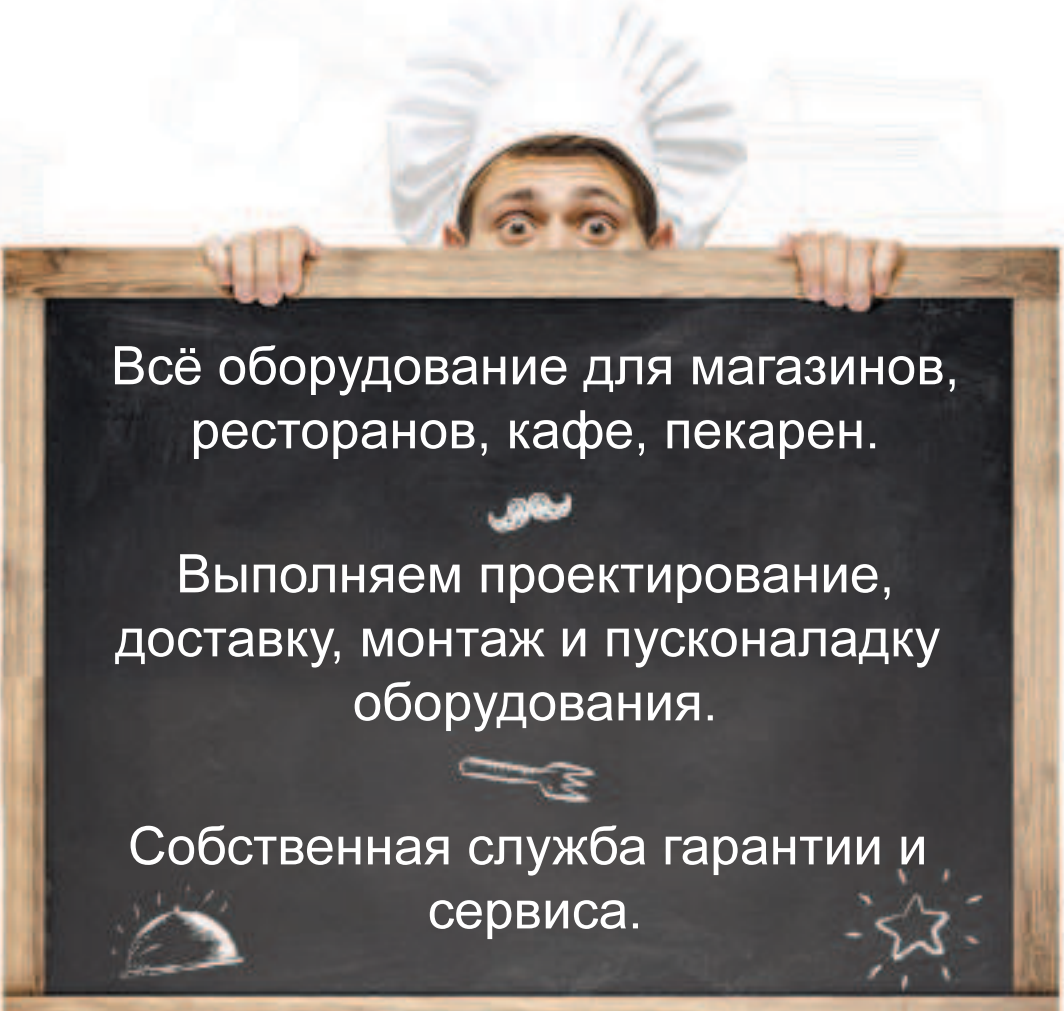

Всё оборудование для магазинов,  
ресторанов, кафе, пекарен.

Выполняем проектирование,  
доставку, монтаж и пусконаладку  
оборудования.

Собственная служба гарантии и  
сервиса.



### Washer extractors

#### High Spin washer extractors TP

## HIGH SPIN WASHER EXTRACTOR, LA-14 TP E

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>
Length	mm	<b>788,00</b>	<b>830,00</b>
Depth	mm	<b>870,00</b>	<b>1.010,00</b>
Height	mm	<b>1.301,00</b>	<b>1.560,00</b>
Weigth	Kg	<b>250,00</b>	<b>283,00</b>
Volumen	m3		<b>1,31</b>

### ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		<b>9,50</b>
230V - III		<b>OPC2x16+T-63A</b>
400V - III+N		<b>3x6+T -40 A</b>
		<b>4x2,5+T - 25 A</b>

### WATER

Water consumption (lit/h)	<b>168,00</b>
Pressure (Kg/cm2)	<b>2 - 4</b>

### GAS

Not used

### STEAM

Not used

### AIR

Not used


### LEVEL SOUND

(dB) **60,00**

### HIGH SPIN WASHER EXTRACTOR, LA-14 TP E

Made of stainless steel.  
 Capacity: 14 kg (1:9) or 13 kg (1:10).  
 Microprocessor "Touch Plus Control" with display.  
 26 pre-set programs (4 economic programs).  
 Possibility of programming, export and import programs through USB memory, without limite.  
 "WASH CONTROL" management software included.  
 Digital sequence display.  
 8 signals for automatic liquid dosing, programmable in time and delay.  
 Possibility to install an automatic detergent doser on the rear of the machine.  
 Detergent dispenser with 4 compartments (pre-wash, wash, bleachers and softeners).  
 Water levels completely modifiable.  
 3 water inlets (Hot water, Cold water, Soft water).  
**WET CLEANING SYSTEM:**  
 -Water levels completely modifiable.  
 -Possible manual dosing for evey 8 signals during the cycle.  
 -Minimum washing speed: 15 r.p.m.  
 -Minimum thrythm ON-OFF: 1 second.  
 Safety switch for door opening.  
 Wash and spin speeds are configurable.  
 These machines have electronic control of imbalance with frequency variator, that detects the load uncentered before spinning.  
 No need to be fixed to the floor.  
 Drum diameter: 620 mm.  
 Deepth drum: 430 mm.  
 Door diameter: 373 mm.  
 Spin speed: 1.150 r.p.m.  
 G Factor: 450.  
 Easy to attach automatic dosser dispenser at rear of machine.  
 Water consumption in program n° 2 60°: 168 litres.  
 Heating system: Electric.  
 Elements heating power: 9 kW.  
 Total power: 9,50 kW.  
 Dimensions: 788 x 869 x 1.301 mm

<u>Connections points</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	108	0	1.022		0
SOFT COLD WATER	494	0	1.202	3/4"	
DRAIN	252	0	130	3"	
COLD WATER	714	0	1.222	3/4"	
HOT WATER	554	0	1.202	3/4"	



## Наши контакты:



**Отдел продаж:** (495) 212-91-86  
(800) 333-30-81  
(звонок по РФ бесплатный)

**Запчасти:** (495) 374-78-30

**Ремонт, гарантия, ТО:** (495) 215-52-98



**Отдел продаж:** [info@refro.ru](mailto:info@refro.ru)

**Проектирование:** [project@refro.ru](mailto:project@refro.ru)

**Запчасти:** [zip@refro.ru](mailto:zip@refro.ru)

**Ремонт, гарантия:** [service@refro.ru](mailto:service@refro.ru)